


AA110

Vinyl Stair Nosing

Image/ Drawing

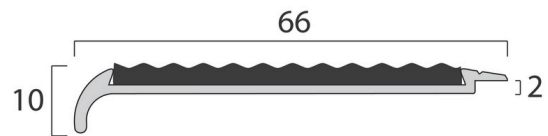

Description

Natural Satin Anodised Aluminium Short Front Square Stair nosing Profile. With a special blend of P.V.C. and sustainably sourced industrial sand, giving a homogeneous hard wearing anti-slip flooring for wet and dry conditions

Purpose

This stair nosing product provides economical safety for 2mm vinyl covered stairs. It can also be used with any other 2mm floorcovering or can be installed in a 2mm stair rebate.

Material

- Anodised Aluminium
- Standard 3.66 Metre Lengths
- Supplied pre drilled for countersunk screw fixing (screws supplied)

Insert

1 x 53mm Tredsafe Diamondtred Insert



Insert

Special properties

Tredsafe's Diamondtred insert is resistant to attack from ultraviolet light, oil, grease, petrol, salt, dilute acids on alkalis, common household chemicals and detergents. Organic solvents will soften the Diamondtred insert.

Fields of application

Suitable for interior or exterior use

Slip Resistance**AS/NZS 4586 - 2013**

Wet Pendulum – mean 47 – class P4

Dry Floor – mean 0.75 – class D1

Wet/Barefoot ramp – Result 30° – class C

Oil – Wet Ramp – Result 21° – class R11

AS/NZS 3661.1:1993

Dry (tortus): 0.80

Wet (pendulum): 0.44

BS 7976:2002

Pendulum test - dry | PTV average 57

Pendulum test - wet | PTV average 47

DIN 51130:2010

Inclined platform test: R11

Flammability and smoke density**AS1530.3.1982**

Flame Spread = 0 Smoke Dev = 7

AS/ISO 9239.1 2010

Mean Critical Radiant Flux 10.3kw/m²

Mean smoke development rate 85
percentage minutes

Insert

| Description | | Values |
|--------------------------------------|-------------------------------|-------------------------------|
| Residual indentation | 2.5mm dial guage | Mean 0.05mm |
| Dimensional stability 80°C 6 hours | | 0.12% |
| Moisture movement 23°C 24 hours | | 0.02% |
| Elastic property Tensile strength | | 2.48mj/m3 |
| Heat Ageing 70°C for 15 days | Exudation Colour change | None None |
| Wear Resistance Taber Abraser | 1kg load H18 wheel @ 60rpm | 1000 revs 0.6m weight loss |

Information given in this data sheet is based on the current state of knowledge. This does not exempt the purchaser from carrying out his own careful inspections of incoming goods and their suitability for local building codes. We reserve the right to make changes to the product data in the course of technical progress or due to operationally related further development. Owing to factors beyond our control during application, recommendations given in this data sheet require tests and experiments by the customer. Our recommendations do not exempt the customer from the obligation to check any infringements of third-party rights himself and eliminate them if necessary. The suggestions for product use are not equivalent to a warranty of its suitability for the recommended purpose.

Each new release of this data sheet supersedes the previous one.

Release: June 2025