Tredsafe




Product Catalogue Define your edge.

Ordering Tips			07.
Stair Nosing Matrix			09.
Transition Matrix			11.
Product Catalogue	Stair Nosings	Vinyl Carpet Timber Uncovered Ceramic	13.
	Transitions	Carpet to Vinyl To Bare Floor Variable Height Difference Construction Joint Cover Walkway	26.
	Edging	Floating Floor Floor to Wall	40.
	Tactiles	Tactile Ground Surface Indicators	46.
	Matting	Entrance Matting	48.
Inserts and Customisation			50.
Technical Information			60.

Proudly New Zealandowned and family-operated, Tredsafe has been crafting safety solutions for the flooring industry since 1982, spanning three generations.

After years of experience in the industry, we recognised that existing safety materials didn't meet the durability demands we required. Extensive research led us to develop our own unique product, Diamondtred, right here in New Zealand. We perfected a formula that delivers the reliability, functionality, and design excellence we stand for. While it's been embraced by Kiwis for decades, our reputation has grown internationally across four continents and twelve countries.

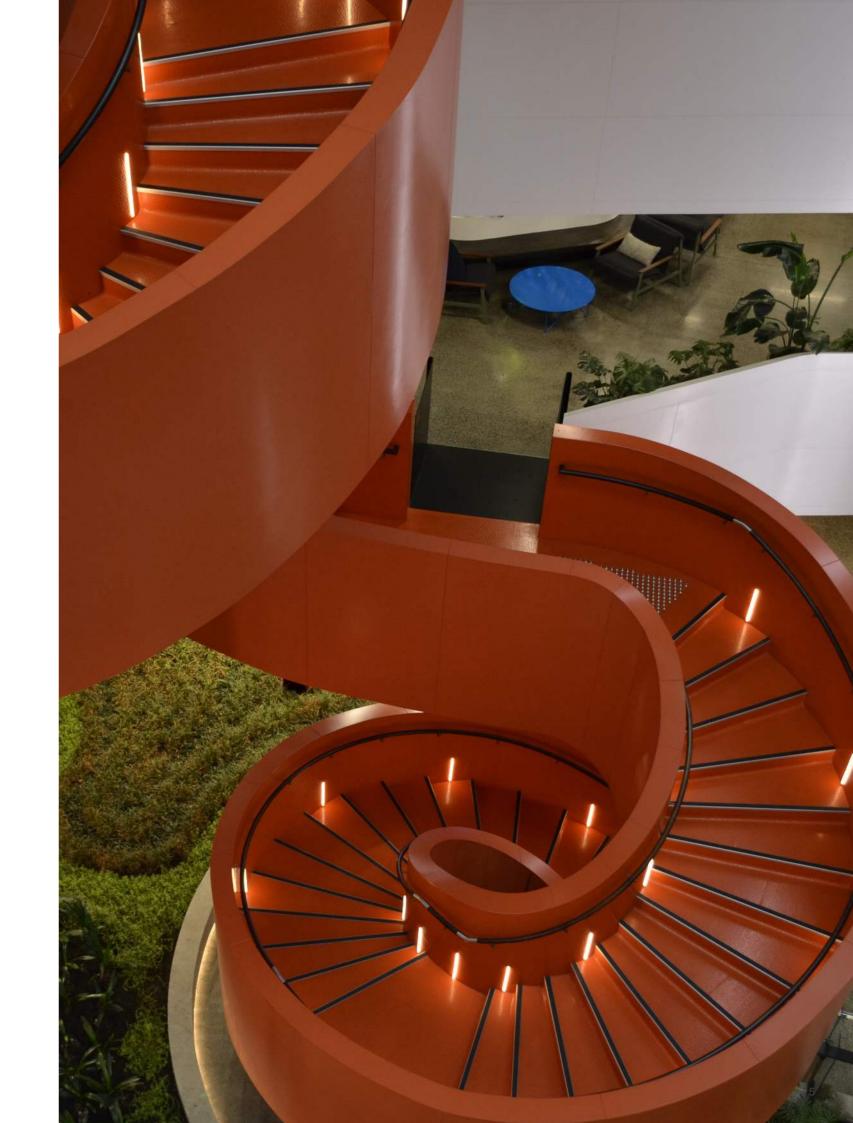


The Diamondtred Difference

Diamonds in the rough

Our unique stair nosing inserts stands out worldwide, featuring sustainably sourced sand from New Zealand's Tapora region. Combined with a raised diamond shape, this innovation delivers exceptional 360-degree slip resistance. Built to last, it's engineered to endure heavy use with minimal wear and tear, providing long-term safety and durability you won't find anywhere else.

Available in 20 stocked colours, with colour and brand customisation available

Diamond-shape provides 360-degree slip resistance

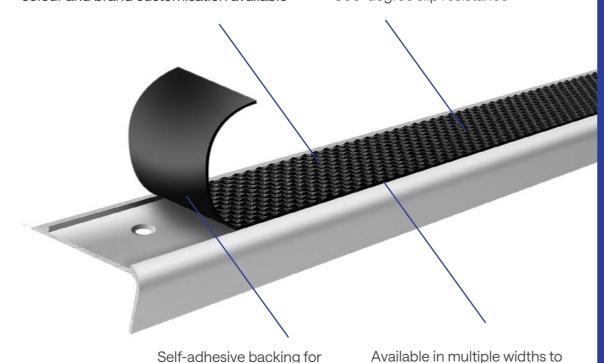

ease of installation

Visit page 50 for more information

suit every Tredsafe profile

Ordering tips

Stair Nosings

The maximum length is 3.66m (or 2.5m for contoured variants and friction bars). Cut to length services are available. When specifying or ordering you need to advise:

- The product code
- The finish or colour
- Length required (to the nearest two decimal places)
- Quantity required per length

Inserts

The maximum lengths of our inserts are 25m. When specifying or ordering you need to advise:

- Colour (stocked or custom)
- Length required

Optional

 If multiple inserts required, advise if you want to mix and match colours

Aluminium Transitions and Edging

Supplied in 2.5m lengths. When specifying or ordering you need to advise:

- Product code
- Finish
- Number of lengths required

PVC Edging

Supplied in 20m or 25m coils (see product details). When specifying or ordering you need to advise:

- Product code
- Colour
- Number of coils required

Matting

CONNEXX is sold per 1sqm/box. When specifying or ordering you need to advise:

- Number of boxes required
- Add DT080 if an entrance matt ramp or framing is required

Tactiles

Available in 900, 1200 or 1500 x 600mm with compliant dome spacings and anti-slip qualities. Sold by the sheet, but can be customised by cutting down to suit compliance and site requirements



Stair Nosing Matrix

Stair nosing style

	otali riosing style				
	Small Drop (10mm drop on riser)	Straight Drop (26-47mm drop on riser)	Bullnose (15-39mm drop on riser)	Rakeback (23-36mm drop on riser)	No Drop
	AA128* (p18)	_	_	AA125* (p18)	AA129 (p36)
Bare	AA138* (p19)	_	_	AA207 (p19)	AA231 ^(p37)
	_	_	_	AA347 (p19)	AA137 (p37)
	AA124* (p15)	AA123* (p14)	AA345 (p16)	_	-
Carpeted	AA134*(p15)	_	AA121 (p14)	_	-
	_	_	EL165 (p17)	_	-
	_	_	UP121 (p16)	_	-
M	AA110* (p21)	AA108 (p21)	AA115 (p22)	AA107 (p20)	-
Vinyl	AA130* (p23)	AA114 (p22)	_	AA216 (p23)	-
	_	AA109 (p21)	_	AA106 (p20)	-
	_	UP117 (p23)	_	_	_
	_	_	AA252 (p24)	_	_
Tile					

* Contoured profile available



Transition Matrix

Height variation between flooring

	0-2 _{mm} Height Variation	2-5 _{mm} Height Variation	5-10 _{mm} Height Variation	10-20 _{mm} Height Variation
	DT022* (p28)	DT024 (p28)	DT084 (p31)	-
Carpet to	DT027 ^(p29)	DT030* (p29)	DT085 (p31)	-
Vinyl	DT029 (p36)	DT040 (p31)	DT086 (p31)	-
	DT033* (p29)	-	-	-
	DT036* (p30)	-	-	-
	DT038* (p30)	-	-	-
	-	DT065* (p33)	DT028 (p32)	-
Carpet/	-	DT047* (p33)	DT031* (p32)	-
Vinyl/LVT to Bare Floor	-	_	DT064* (p33)	-
	-	_	DT043 (p34)	DT044 (p34)
Hard Flooring Variable Height Difference	-	-	DT070 (p35)	DT071 (p35)

^{*} Contoured profile available

Stair Nosing

Tredsafe's stair nosing serves both safety and aesthetic purposes. They protect the edges of the stairs from wear and tear, while adding anti-slip and visual definition to each step to reduce the risk of accidents. Designed to suit all applications and environments, our anti-slip stair nosing treads provide superior traction and visibility.

Key features

- Available in different materials including anodised aluminium, or rigid PVC
- Best-sellers are available in different anodised colours
- Nosing inserts come in a variety of 20 stocked colours
- Standard 3.66m lengths
 - Supplied pre-drilled for screw fixing and easy installation
 - Cut to length service available so you can install quicker

Applicable floor covering

- Carpeted
- Uncovered
- Timber
- Ceramic tile
- Vinyl

Customisations

If you have a unique requirement, Tredsafe has customisation options available for you including:

Bringing your design to life

- Custom branded inlays
- Custom insert colours

Solving tricky flooring requirements

- Custom profiles
- Contoured profiles

Stair visibility in dark conditions

- LED capable profile
- Glow in the dark inserts (Lumitred and Zebron)

Go to pages 54-59 to find out more information.

Vinyl

Carpet


Uncovered

Timber

Ceramic


Stair nosing Carpeted

AA121



- 1 x 43mm insert
- 38mm bullnose drop on riser

AA123 AA123CN*



- 1x53mm insert
- 47mm right angle drop on riser
- Contoured profile available (AA123CN)
- Zebron compatible (not on contoured)



Finishes











Finishes







Natural Black Bronze Brass

Compliance

Material

Anodised

Aluminium



EU

NZ


Compliance








AA124 AA124CN*



- 1 x 53mm insert
- 10mm drop on riser
- Contoured profile available (AA124CN)
- Zebron compatible (not on contoured)

AA134 AA134CN*



- 1x 63mm insert or 1x 53mm insert with a 10mm glow strip insert
- 10mm drop on riser
- Contoured profile available
- Zebron compatible (not on contoured)





Contoured





Material









Anodised Aluminium

Material



Finishes

Natural








Compliance

NZ AUS Compliance










Stair nosing Carpeted

AA345

76

- 3 x 13mm inserts can be ordered in different colours
- 35mm bullnose drop on riser

UP121



- 1x 43mm insert
- 36mm bullnose drop on riser



Material

Interior/





Material



Finishes

Anodised Aluminium



Natural







Black Charcoal

Compliance








Compliance







EL165 (LED)



- 1x 43mm insert
- 36mm bullnose drop on riser
- Requires 12v or 24v power supply
- LED strip multi-colour or single colour



Interior/ Under cover

Material







Finishes

Compliance US





Illuminated Colour Options

Single Colour

Warm White 3000K




Natural White 4000K

Cool White 63000K


Multi-Colour

RGB. All colour options within the colour line. Remote or wall mounted colour wheel can be added.




Stair nosing Uncovered/Bare

AA125 AA125CN*



AA128 AA128CN*



- 1x53mm insert
- Ramped back edge to avoid trip hazards on uncovered stairs
- 24mm rake back drop on riser
- Contoured profile available (AA125CN)
- 1x53mm insert
- Ramped back edge to avoid trip hazards on uncovered stairs
- 10mm drop on riser
- Contoured profile available (AA128CN)

1 x 53mm

Interior/



Contoured Profile Available







Finishes







Material



Anodised Aluminium







Material



Anodised Aluminium



Natural Satin



Compliance










AA138 AA138CN*



- Ramped back edge
- 10mm drop on riser
- Zebron compatible (not on contoured)

• 1x 63mm insert or 1x 53mm insert

with a 10mm glow strip insert

Contoured profile available (AA138CN)

Finishes

Natural

EU

NZ

AUS

Satin


AA207



2 x 43mm inserts - can be ordered in different colours

- Ramped back edge to avoid trip hazards on uncovered stairs
- 36mm universal drop on riser

AA347



3 x 13mm inserts - can be ordered in different colours

- Ramped back edge to avoid trip hazards on uncovered stairs
- 23mm drop on riser





Material

Anodised

Aluminium

Compliance

US





Contoured Profile Available











Aluminium

Compliance

CAN





EU

NZ









Finishes Material



Anodised

Natural

Compliance

CAN US EU NZ







Stair nosing Vinyl


AA106

56 32

- 1 x 43mm insert
- Back rebated edge to hide join with vinyl
- 32mm drop on riser

Interior/

AA107



- 1x 43mm insert
- Butt join to vinyl, recess or install in conjunction with a packer for higher floor coverings
- 32.5mm rake back drop on riser













Aluminium

















AA108




- 1 x 43mm insert
- Back rebate to hide join with 2mm
- 44mm right-angle drop on riser

AA109



- 1 x 43mm insert
- Butt join to vinyl, recess or install in conjunction with a packer for higher floor coverings
- 44mm drop on riser

AA110 AA110CN*



- 1x 53mm insert
- Back rebate to hide join with 2mm
- 10mm drop on riser
- Contoured profile available (AA110CN)





1x 43mm Interior/ Exterior



Interior/

1 x 53mm Insert







Finishes

Material

1 x 43mm



Anodised Aluminium

CAN



Finishes









Natural Black Bronze Brass

Finishes



Material

Anodised Aluminium





Material

Aluminium

Compliance

US

CAN



Natural

EU

NZ



Anodised


Aluminium

Natural

Compliance


















21


Stair nosing Vinyl

AA114




- 1 x 43mm insert
- Butt join to vinyl, recess or install in conjunction with a packer for higher floor coverings
- 26mm right angle drop on riser

AA115



- 1 x 43mm insert
- Butt join to vinyl, recess or install in conjunction with a packer for higher floor
- 39mm bullnose drop on riser


AA130 AA130CN*



- 1x 63mm insert or 1x 53mm insert with a
- Back rebated edge to hide join with vinyl
- 10mm drop on riser
- Zebron compatible (not on contoured)
- Contoured profile available (AA130CN)

10mm glow strip insert

UP117



Butt join to vinyl, recess or install in

35mm right angle drop on riser

Finishes

conjunction with a packer for higher

- 2 x 37mm inserts can be ordered in different colours
- Butt join to vinyl, recess or install in conjunction with a packer for higher floor coverings
- 35mm rake back drop on riser



Material

Anodised

Aluminium



Interior/

Finishes

Natural



Material

Anodised

Aluminium

Interior/

Finishes

Natural

Satin





Interior/

Finishes

Natural

Contoured Profile Available

1x 43mm Interior/ Under cover

1x 43mm insert

floor coverings









2 x 37mm Interior/

AA216





Anodised Aluminium

Natural

Compliance

EU CAN NZ





Material

Anodised

Aluminium

















Compliance

CAN

EU

NZ














Stair nosing Ceramic/Tile

AA252



- 2 x 13mm inserts can be ordered in different colours
- Suitable for fitting over existing tiles
- 15.5mm right angle drop on riser



2 x 13mm Interior/

Material



Anodised




Finishes

Natural


Compliance





Stair nosing Friction Bar

Friction Bar



- Can be used in concrete, or timber
- Use a minimum of 2 bars together for greater slip resistance
- Available in 2.5 metre lengths



Interior/

Material



Anodised

Aluminium







Compliance







Transitions

Tredsafe flooring transitions offer an ideal solution for seamlessly connecting different surfaces, such as LVT, carpet, and vinyl, to bare floors or other surfaces with height variations. These transitions serve as an appealing protective barrier, preventing flooring edges from damage, whilst creating a safe and level transition, reducing the risk of tripping hazards. All are supplied in 2.5m lengths

Key features

- Some available in different anodised finishes including black, brass, and bronze
- Standard 2.5m lengths, supplied pre-drilled for screw fixing and easy installation
- Most transitions are available in a contoured version to fit the curves of your flooring requirements

Applicable floor coverings

- Carpet
- Bare/uncovered
- Ceramic tile
- Vinyl
- LVT
- Rubber

Carpet to Vinyl

To Bare Floor

Variable Height Difference

Construction Joint Cover

Walkway

Transitions Carpet to Vinyl


DT022 DT023*

DT024

DT027 DT030 DT035*


DT033 DT034*





2mm floor coverings to carpet

Available in contoured (DT035)



• 3mm floor coverings to carpet

Available in contoured (DT034)

- 5mm floor coverings to carpet
- Available in contoured (DT023)

 $0-2_{mm}$ Height

Variation

- 1 x 13mm insert
- Provides a gradual ramp and barrier between two flooring types
- Suitable for 3mm height variations
- Suitable for high traffic flow areas
- Supplied pre-drilled for screw fixing

Finishes



Insert



Variation

• 1 x 13mm insert



Provides a gradual ramp and barrier

Suitable for high traffic flow areas

Supplied pre-drilled for screw fixing

between two flooring types • Suitable for 2mm height variations





Interior/ Exterior









Material



Finishes

Natural







Material

Anodised





Natural Black Bronze Brass















Finishes





Aluminium

Anodised







NZ AUS











Material



Compliance

Aluminium













Transitions Carpet to Vinyl


DT036 DT037*

DT038 DT039*


DT040

DT084

DT085








Ramped base for easy installation

• 2mm vinyl to carpet



DT086




- 3mm floor coverings to carpet
- Available in contoured (DT037)
- 4mm floor coverings to carpet
- Available in contoured (DT039)

- 2mm-3mm vinyl to cushion back carpet tile or 8mm floor covering
- Ramped base for easy installation
- 10mm floor covering to either 2.5mm or 5mm floor covering
- Ramped base for easy installation





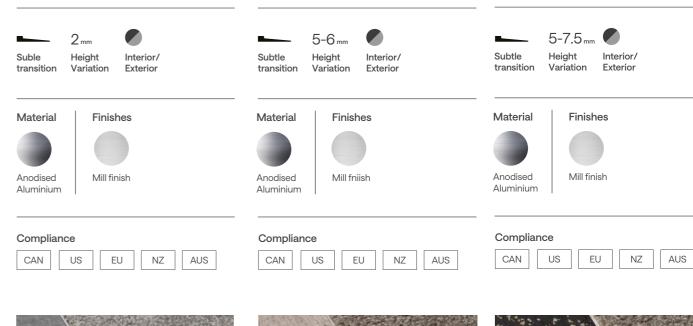










Transitions To Bare Floor


DT028

DT031 DT032*






DT065 DT067*



DT047



- 1 x 13mm insert
- Provides a gradual ramp
- Suitable for 5mm height variations
- Suitable for high traffic flow areas
- Supplied pre-drilled for screw fixing
- Suitable for carpet to bare floors
- Available in contoured (DT032)

- Suitable for 5mm-5.5mm floor coverings to bare floor
- Available in contoured (DT066)
- Suitable for 3mm floor coverings to bare floor
- Available in contoured (DT067)
- Bevelled edge under 5mm
- Available in contoured (DT048)







Variation







Available













Finishes

Contoured Profile Available

NZ

AUS







Contoured Profile Available

33

Material



Anodised Aluminium



Finishes





Aluminium



Finishes







Natural Black Bronze Brass

NZ

Material







Finishes



EU

NZ



Anodised Natural Aluminium







Natural

Finishes

Compliance











Compliance









Aluminium

Material













Transitions Variable Height Difference

DT043

- Suitable for 7mm or 8mm height variations
- Supplied with double sided selfadhesive backing tape for fixing

7 & 8 mm

Variation

Finishes

Natural

EU

NZ

Material

Anodised


Aluminium

Compliance

US

CAN

DT044



- Suitable for 10mm or 11mm height variations
- Supplied with double sided self-adhesive backing tape for fixing













Interior/ Exterior

Material



Anodised Aluminium



Natural

Finishes


Compliance








DT070



- Robust rotating design
- Suitable for height variations
- Supplied pre-drilled for screw fixing

DT071



- Robust rotating design
- Suitable for height variations 5mm to 20mm
- Supplied pre-drilled for screw fixing



Material

Anodised

Aluminium



Finishes

Natural

Satin

Variation



Exterior





Height Variation



Interior/ Exterior





Anodised Aluminium



Compliance


















Transitions Walkway

DT029

AA129

AA137 AA231









- 1 x 13mm insert
- Protective ramped transition between even height floor coverings
- Suitable for high traffic flow areas
- Supplied pre-drilled for screw fixing
- 1 x 53mm insert
- Ramped edge to avid trip hazards on uncovered stairs

- Designed for use on uncovered stairs or for accessway guidance/ramp safety
- 1x 63mm insert or 1x 53mm insert with a 10mm glow strip insert
- Zebron compatible

- 2 x 13mm inserts can be ordered in different colours
- Ramped edges to avoid trip hazards
- Designed to reduce slip hazards on ramps and decks





Ramp with Variation



Finishes

Natural





Insert

Material

Anodised





Interior/ Exterior

Finishes

Natural



1x53mm+ 10mm insert OR 1x 63mm

Material

Anodised

Aluminium



Finishes

Natural

EU

Interior/ Exterior





Interior/







Material









Anodised Aluminium

Material



















Compliance
























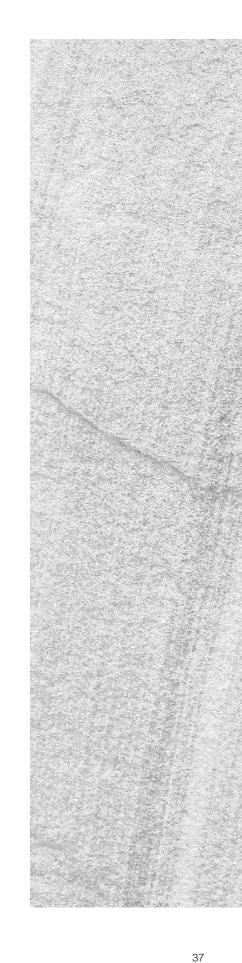


Transitions Construction Joint Cover

DT025

DT026





- Use with 2mm vinyl or 53mm insert in the recess space
- Supplied pre-drilled on one side of the recess
- Use with direct stick carpet or carpet tile directly into the recess space
- Supplied pre-drilled on one side of the recess



Material











Interior/











Finishes

Natural

Compliance





Finishes



Compliance













Innovative & creative flooring safety solutions that meet industry requirements

Edging

Complete the look of any space with the right edging solutions. Floor edging is essential for finishing transitions where flooring meets walls, skirting, or exposed edges, preventing gaps and creating a seamless finish. Whether filling the space between flooring and skirting or extending flooring up the wall, the right edging ensures durability, visual appeal, and a polished result.

Floating floor Edging

Floating a wood, laminate or LVT flooring requires an expansion joint to accommodate natural expansion and contraction caused by temperature and humidity changes. Edging trim covers and protects the exposed edges while maintaining the floor's stability and appearance. Tredsafe has a wide range of trims suitable for all applications. Suitable for a variety of flooring thicknesses from 4mm. Suitable for interior and exterior use.

Floor / Wall Trims


In many applications, vinyl flooring extends from the floor part-way up the wall. To achieve a clean finish, a trim is needed to cap the vinyl edge and transition to the wall. Our floor-to-wall transitions create a tidy connection that prevents dirt and bacteria buildup, making cleaning and maintenance simpler.

Floating Floors

Floor-to-wall


Edging Floating floors

DT049



- Edge capping and expansion joint for floating floors
- Allows floating floors with thickness of up to 5mm

DT050



- Edge capping and expansion joint for floating floors
- Allows floating floors with thickness of up to 10mm

 $2.5_{\,\mathrm{metre}}$ Interior/

Material

Anodised Aluminium Finishes



Natural

Compliance NZ









Anodised


AUS



Finishes


Compliance








DT051



- Edge capping and expansion joint for floating floors
- Allows floating floors with thickness up to 15mm

DT052



- Use as a retrofitted capping
- Double-sided tape pre-applied for easy installation

 $2.5_{\,\mathrm{metre}}$ Lengths

Material

Anodised

Compliance





Finishes

Natural



NZ AUS







Material

















Edging Floor-to-wall

DT059



- Provides a finished edge to coved 1.5mm-2mm floor vinyl
- Ultra thin 0.5mm tapered edge to eliminate any vinyl indentation

DT061



- Provides a finished edge to coved 2mm floor vinyl
- Ultra thin tapered edge to eliminate any vinyl indentation

 $20_{\,\text{metre}}$ Coils









Interior/

Anodised Aluminium

 $2.5_{\,\mathrm{metre}}$

Material



Natural Black Bronze Brass



Semi Rigid









Compliance

CAN






Compliance







DT063



- Z-flashing
- Provides a neat junction between vinyl and wall panels

DT068

- Use as a packer where 1.5mm wall vinyl meets 2mm floor vinyl
- Makes vinyls flush for seam welding

DT069



- Protective wall skirting trim for coved 2mm floor vinyl
- Used extensively in hospitals and aged



Material

Anodised

Aluminium

Compliance





 $25_{\,\text{metre}}$ Coils



Interior

 $2.5_{\,\mathrm{metre}}$ Lengths













Black



Aluminium

Mill Finish



Finishes

Natural

Satin

















Tactiles

Tactile Ground Surface Indicators, or TGSIs, are internationallyrecognised warnings that indicate the presence of pedestrian hazards, such as stairs or slopes, particularly aiding those with visual impairments.

Tredsafe's Alltac Sirius Plates provide a smarter, more durable solution for tactile requirements. These robust plates are designed for longevity, ensuring hardwearing performance in high-traffic areas. With fewer holes to drill and less adhesive required, installation is faster and more efficient, minimising disruption. Unlike single-stud TGSI systems, Alltac Sirius Plates cover damaged areas seamlessly, reducing the need for time-consuming substrate repairs and helping maintain compliance over time.


Main Application Field

- Anywhere that presents pedestrian hazards such as stairs or slopes
- Suitable for interior and exterior use

Product Feature & Benefits

- Easy and fast installation
- 360 degrees slip resistance
- Higher LRV values* compared to traditional TGSIs
- profile for improved safety
- Marine-grade aluminium construction
- Available in mill finish, platinum, griptex black and griptex yellow

Alltac Sirius Plate



- Available in multiple plate sizes 900x600mm 1200x600mm 1500x600mm
- Double-sided tape pre-applied for easy
- Can be cut to size requirements



Material



Aluminium



Finishes






















Matting

Protect your building entrance with the trusted CONNEXX entrance matting system. CONNEXX offers a clean, flexible, and effective solution for every entrance area to absorb moisture and brush away dirt.

Main Application Field

- Insert into an existing mat well for a seamless look
- Install on top of existing flooring along with Tredsafe's proprietary finishing trim without the need to create a mat well, ensuring you are meeting building code requirements

Product Features & Benefits

- High moisture absorbance ensuring water doesn't get into your building with 100% PA6.6
- Coarse dirt is caught in the gaps while the inserts absorb moisture and residual dirt keeping your building cleaner for longer
- Easy maintenance as dirt can be easily vacuumed without having to remove the entrance matting
- Module system means that it is easy to install and replaced
- UV Resistant PVC making sure your mat will not fade overtime UV Resistant PVC 100% soft PVC

DT080 Ramp


If your space doesn't have a mat well in place, Tredsafe's DT080 ramp finishing trim is the perfect solution.

- Powder-coated aluminium in black
- Space for 37mm Diamondtred insert
- Excellent slip-resistance when wet
- Suitable for interior and exterior use
- Transition for 15mm height variations
- Ideal for high traffic flow areas

CONNEXX

DT080





- Supplied in boxes
 (1 box = 16 modules = 1m2)
- Connects together easily
- Can be cut down to fit into unique corners or wall shapes
- Ramp finishing trim
- Powder coated aluminium in black
- Transition for 15mm height variations
- Suitable for high traffic flow areas

1m2 Boxes





1 x 37mm Interior/ Insert Exterior

2.5m

Lengths

Material



PVC

Material



Aluminium



Finishes

Black finish

Compliance


AN US EU NZ

Compliance

CAN U

EU NZ






Diamondtred Insert

Tredsafe inserts have a unique raised pyramid texture which provides exceptional multi-directional slip resistance. All Tredsafe inserts come with a self-adhesive peel and stick backing tape for ease of installation and concealment of fixing screws for a neat and tidy job.



The adhesive is strong and ready to withstand temperature fluctuations from below -40°C to 140°C. It will not peel, warp, or shrink - ensuring your stairs remain safe even in cold or hot conditions. The colour range provides extreme visibility to highlight the edge of a step or landing. All inserts (except Chevron) are available in 13mm, 37mm, 43mm or 53mm widths.

Subtle Colours

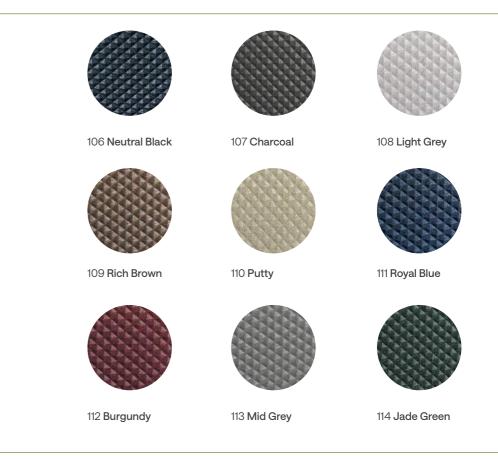

Safety Colours



Chevron is supplied in 1.2 metre lengths in 37mm and 43mm widths only Developed to give maximum visibility for step edges
Used extensively in the transport industry and in hazardous areas



Can't find the colour you want? We can create our inserts in any colour. Visit p.56 for more info.

Bespoke Inlays

Our bespoke inlays offer a clean, integrated look, ideal for wooden staircases and other architectural applications. Designed for both new builds and retrofitting, these inserts provide a simple way to enhance the appearance of stairs while ensuring long-lasting durability. The ability to retrofit means existing staircases can be updated without major renovations, making them a practical choice for projects requiring both form and function. Perfect for spaces where design and safety need to work together.





The best safety solutions for your business

Low-Light Products

Your stairs should stay safe, no matter the lighting. Tredsafe provides a variety of products to ensure stair safety, including LED nosing profiles and glow-in-the-dark inserts, giving you reliable visibility and safety around the clock.

LUMITRED

The Lumitred range provides the ultimate solution in reduced light conditions. Utilising phosphorescent pigments, the inserts are charged by natural or artificial light and activate instantly in failing light conditions. Lumitred inserts are available in 13mm, 37mm, 43mm or 53mm widths.

Applications

- Emergency exits for commercial or multi-residential buildings
- Guidance / way finding
- Supporting the visually impaired
- Theatres
- Stadia

Features


- Lumitred is an environmentally better choice as it is completely free of PVC reducing environmental impact.
- The glow pigment is co-extruded into the product giving it increased lifespan and all round glow performance - tested in accordance with Section 34, UL1994 "Standard for Safety" Luminous Egress Path marking Systems and sections of ASTM E2073-02. Visual acuity test conducted up to 300 minutes which is over 3 times the test requirement.



In bright conditions




In low-light conditions

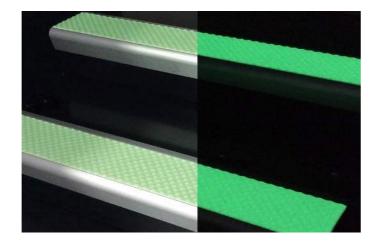

ZEBRON

Zebron combines the extensive Diamondtred insert colour range with a Lumitred insert to provide a total stair nosing solution. Zebron is a 13mm wide strip of Lumitred, coupled with any colour to fit 37mm, 43mm or 53mm wide inserts. Lumitred may also be used as a Zebron strip in a 13mm wide insert.



Swatches



Putty

Safety







Blue





Rich

Brown







Orange





Safety

Green

Grey








Tredsafe

EL165 - LED PROFILE

Illuminate your staircase with style using the EL165 LED-capable stair nosing. Designed to seamlessly integrate an LED strip, this profile enhances both safety and aesthetics. Choose from a range of light colours, and customize your lighting with optional remote or wall-mounted colour control for the perfect ambiance.

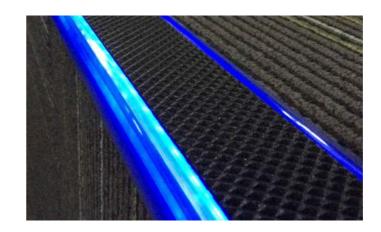


Visit page 17 for more information

Customisation

If you can dream it, Tredsafe can make it! Our customisation services cover everything from insert colours to profile shapes, allowing you to achieve the exact look you want to complement your designs perfectly.

Colour Customisation

Looking for a specific colour for your inserts? Tredsafe offers Pantone colour matching to ensure your design vision comes to life. Whether you're after a bold statement or a subtle complement to your space, we'll take care of the details. Please note that a minimum order quantity applies for custom colours.

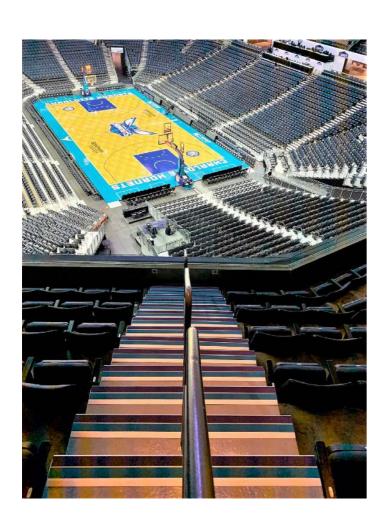







Spectrum Center is an indoor arena localed in Charlotte, North Carolina, United States. Operated by its main tenant, the NBA's Charlotte Hornets, the arena seats up to 20,000 people. Tredsafe was able to undertake this stair nosing refurbishment project which included custom coloured inserts for the stadium. A total of 3.4km of custom coloured teal and purple insert (Hornet's team colours), were installed on the stairways of the arena.

This was nomianted for the 'Best Branded Environments' - for the Spark Awards, part of Fuse Alliance.

Brand Customisation

Elevate your stair customisation even further with branded or custom messaging on your inserts—an exclusive service from Tredsafe. This unique option offers a cost-effective way to showcase your brand, even on the stairs.

Way-finding, seat and aisle numbers, or brand sponsorship is available to be added on request. Digital mockups are available within 48 hours, and physical samples are available within 7-14 days upon request to help bring your vision to life.

ROW	SEATS	Tredsafe	ROW	SEATS
12	1-25	lieusule	12	26-50
ROW	SEATS	Tradacifa	ROW	SEATS
12	1-25	Tredsafe	12	26-50


Example of digital concepts with Row and Seat markings



Example of custom sample concept for the Charlotte Hornets

Profile Customisation

For special project requirements, Tredsafe can design and manufacture custom profiles. This service includes concept design and 3D printed samples. Lead times for samples are approximately 2-3 weeks. Enquire for pricing.



Example of custom 3D render of stair nosing concept

Contoured Profiles

Tredsafe understands that sometimes there are some tricky jobs and have therefore re-engineered several of the most popular stair nosings and transitions to allow contoured installation on-site.

Contoured Nosings

These stair nosings are available in 2.5m lengths and are priced in a complete set (excluding insert). They are a two-part system which is both economical and easy to install. Works with regular colour insets – Lumitred, Zebron and Chevron are not available for contoured profiles. To ensure the profiles are not over extended, which may cause product failure or defects, the minimum radius for each profile are as per the table below.

Product Code	Min Radius	Insert Size	Designed For	Length	Material	Page
AA123CN	500mm	53mm	Carpet Tiles	2.5m	Aluminium	14
AA124CN	500mm	53mm	Carpet Tiles	2.5m	Aluminium	15
AA134CN	550mm	63mm	Carpet Tiles	2.5m	Aluminium	15
AA110CN	500mm	53mm	Vinyl	2.5m	Aluminium	21
AA130CN	500mm	63mm	Vinyl	2.5m	Aluminium	23
AA125CN	450mm	53mm	Uncovered	2.5m	Aluminium	19
AA128CN	450mm	53mm	Uncovered	2.5m	Aluminium	18
AA138CN	450mm	63mm	Uncovered	2.5m	Aluminium	19




Example of contoured nosing - available in a twopart system for easy installation


Contoured Transitions

Most of Tredsafe's transitions are available as a contoured variant. These have pre-cuts made to allow for curving in either direction.

Transitions that are available as a contoured variant

Contoured Transition Product Code	Contoured variant of	Page
DT023	DT022	28
DT035	DT030	29
DT034	DT033	29
DT037	DT036	30
DT039	DT038	30
DT031	DT032	32
DT066	DT064	33
DT067	DT065	33
DT048	DT047	33






Example of contoured transition with pre-cuts for easy installation

Insert Installation


Step 1

Ensure the aluminium channel is clean from dust, residues and debris. Wipe down with a cleaning solvent (Denatured or Isopropyl Alcohol or similar.)




Step 2

Pre cut the insert to your required length.




Step 3

Remove the adhesive backing liner from the Tredsafe insert.




Step 4

Install by placing the insert into the nosing and pressing into place without undue stretching.



Step 5

Once in place, roll over the insert to ensure consistent adhesion and a secure bond.



Technical Data Sheet

Insert

Tredsafe insert is manufactured from a special blend of PVC, sustainably sourced industrial sand and polymeric plasticiser giving a homogenous hard wearing flooring for wet and dry conditions (Meets British Standard for Sheet Vinyl and Vinyl Tiles BS3261:1973).

Special Properties

Tredsafe insert is resistant to attack from ultraviolet light, oil, grease, petrol, salt, dilute acids an alkalis, common household chemicals and detergents. Organic solvents will soften Tredsafe insert.

Fields of Application

• Suitable for interior or exterior use.

Technical Data

Description		Values
Residual indentation	2.5mm dial gauge	Mean 0.05mm
Dimensional stability 80°C 6 hours		0.12%
Moisture movement 23°C for 24 hours		0.02%
Elastic property Tensile strength		2.48mj/m³
Heat Ageing 70°C for 15 days	Exudation Colour change	None None
Wear Resistance Taber Abraser	1kg load H18 wheel @ 60 rpm	1000 revs. 0.6gm weight loss
Slip Resistance AS/NZS 3661.1:1993	Dry (tortus) Wet (pendulum)	0.80 0.44
Slip Resistance AS/NZS 4586:2013	A. Wet Pendulum B. Dry Tortus C. Wet-Barefoot ramp D. Oil-Wet ramp	SRV 47 class P4 Mean 0.75 class D1 Mean 30° group C Mean 21° class R11
Slip Resistance DIN 51130:2010	Inclined platform test	R11
Slip Resistance BS 7976:2002	Pendulum test – dry Pendulum test – wet	PTV average 57 PTV average 47
Flammability AS 1530.3:1982	Flame spread Smoke development	0 7
Reaction to fire ISO 9239.1:2003	Mean Critical Radiant Flux	10.3kw/m ²
Dimensions Other sizes available on request	Insert widths Rolls Thickness Weight/m²	13mm, 37mm, 43mm, 53mm 350mm x 25m long 3mm 4.5kg

Technical Data Sheet

Nosing

Aluminium Component

Under normal conditions the extruded aluminium sections are extremely durable, but the following should be taken into account when specifying:

- Aluminium is attacked by alkali in some mortars and plasters in wet conditions
- Electrolytic corrosion is likely when in contact with some metals, particularly copper, copper alloys, iron and steel
- Although it is not affected by most timbers, corrosion is very likely when in contact with wet timber, such as western red cedar, Douglas fir and oak.

PVC component


Extremely durable and unaffected by most chemicals in common use. The UP series of stair finishes are unaffected by insects and will not support the growth of fungi, moulds, or bacteria, resistant to normal thermal loading and ultraviolet, however they are not recommended for use outdoors.

If you require any other technical information on the products listed in this catalogue, visit our website tredsafe.com/documents

Information given in this data sheet is based on the current state of knowledge. This does not exempt the purchaser from carrying out his own careful inspections of incoming goods and their suitability for local building codes. We reserve the right to make changes to the product data in the course of technical progress or due to operationally related further development. Owing to factors beyond our control during application, recommendations given in this data sheet require tests and experiments by the customer. Our recommendations do not exempt the customer from the obligation to check any infringements of third-party rights himself and eliminate them if necessary. The suggestions for product use are not equivalent to a warranty of its suitability for the recommended purpose.

Each new release of this data sheet supersedes the previous one.

Sample Box Map

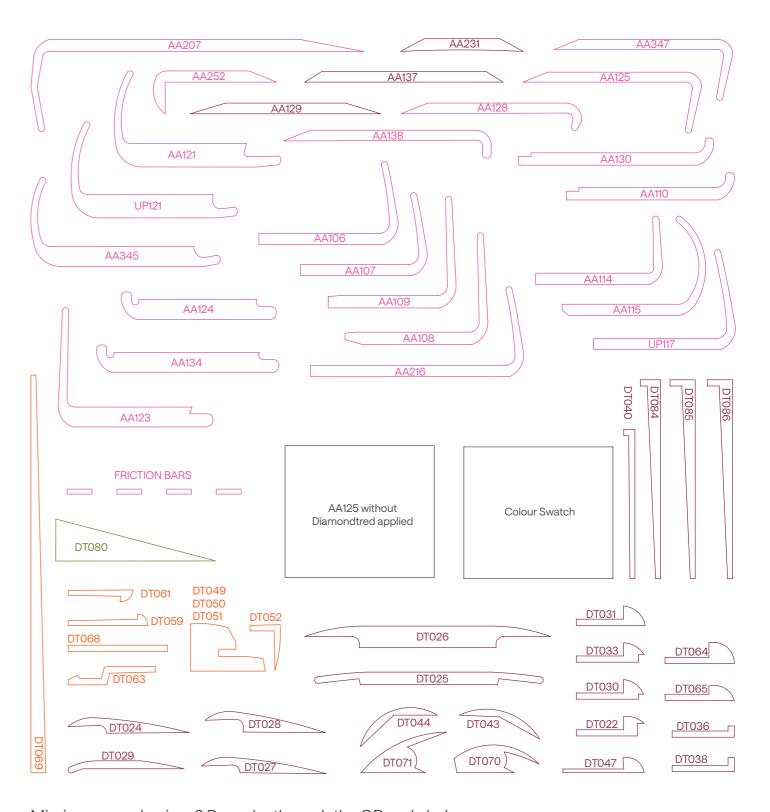

Missing a sample piece? Re-order through the QR code below



